ACEIFLEX® PU

Tubería de PVC flexible reforzada con espiral de PVC rígido anti-choque y con capa interna de PU base poliéster libre de ftalatos y bisfenol A, fabricada según la norma UNE EN ISO 3994
De uso alimentario según reglamentos europeos CE 1935/2004 y UE 10/2011, que requieran el simulante D2 en condiciones OM3
Especialmente diseñada para la aspiración e impulsión de alimentos líquidos y aceites vegetales
Elevada resistencia a altas y bajas temperaturas. Excelente flexibilidad, aún en bajas temperaturas
La mezcla de plásticos no contiene plásticos añadidos intencionadamente que contengan MOAH Y MOSH
Los valores de vacío y presión corresponden a temperaturas de trabajo de 23±2ºC (ISO 291)

Flexible PVC hose reinforced with an anti-shock rigid PVC spiral and an inner layer of polyester-based PU, phthalate-free and BPA-free, manufactured according to UNE-EN ISO 3994
For food use according to European regulations CE 1935/2004 and UE 10/2011, which require simulant D2 in OM3 conditions
Specially designed for suction and discharge of liquid foods and vegetable oils
High resistance to high and low temperatures. Excellent flexibility, even at low temperatures
The plastic mixture does not contain any intentionally added plastics that contain MOAH and MOSH
Vacuum and pressure values correspond to 23±2ºC working temperatures (ISO 291)

ESPECIFICACIONES TÉCNICAS:
TECHNICAL SPECIFICATIONS:

Interior: Superficie lisa en PU
Inside: *Smooth PU surface*


Exterior: Corrugado en PVC
Outside: *Corrugated PVC*

Refuerzo interior: PU anti-abrasiva
Inner Reinforcement: *Anti-abrasive PU*

Temperatura: -20ºC a +80ºC
Temperature: *-20ºC to +80ºC*

Colores disponibles
Available colours

021

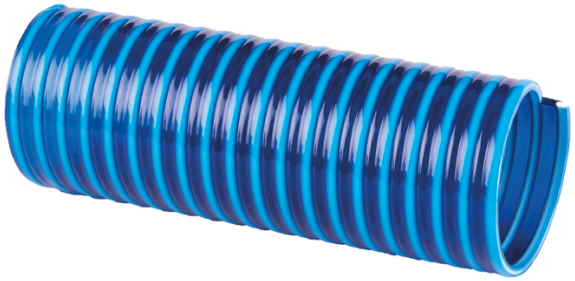

Código *Code*	Ø INT (mm) *Ø INS (mm)*	Ø EXT (mm) *Ø EXT (mm)*	Longitud (m) *Length (m)*	Peso (g/m) *Weight (g/m)*	Presión (bar) *Pressure (bar)*	Vacío (mH2O) *Vacuum (mH2O)*
021025	25	35	50	458	5	9
021030	30	40	50	555	5	9
021040	40	51	50	722	5	9
021045	45*	56	50	850	5	9
021050	50	62	50	1.020	5	9
021060	60	73	50	1.360	5	9
021070	70*	84	50	1.670	4	9
021090	90*	105	30	2.210	4	9
021102	102	116	30	2.800	3	9

Otros diámetros y colores, consultar.

Other diameters and colours, consult.

*Pedido bajo cantidad mínima.

*Minimum order quantity required.

Radio de curvatura: 4xDI.
Bending radius: 4xID.

C/ Garbí 18, naves 1-2 | 08150 Parets del Vallés (Barcelona) Tel | +34 935 199 364 e-mail | comercial@factory-tub-com