



TECH WINE F-370 EPDM



Manguera de caucho EPDM con refuerzo textil y espiral exterior de polietileno. Atóxica

La espiral facilita el arrastre y manipulación

La espiral de polietileno recupera su forma en un 90% en caso de aplastamiento

Aspiración e impulsión de líquidos alimentarios, leche, alcoholes hasta el 50% etc.

Atóxica y de uso alimentario, SIN O-FHTALATOS (Directiva Europea 1935/2004 y sus posteriores modificaciones y Reg. (UE) n.2020/1245 para Simulantes A, C y D1), libre de bisfenol A

Los valores de vacío y presión corresponden a temperaturas de trabajo de 23±2°C (ISO 291)

Temperatura de -20°C hasta +60°C (soporta hasta 100°C para proceso de esterilización a presión baja y por intervalos cortos de tiempo)

EPDM rubber hose with textile reinforcement and external polyethylene spiral. Non-toxic

The spiral facilitates dragging and handling

The polyethylene spiral recovers up to 90% of its shape in case of crushing

Suction and impulsion pumping of foods liquids in general. Alcoholic liquids up to 50% etc.

Non-toxic and for food use, FREE OF O-PHTHALATES (according to European Directive 1935/2004 and its subsequent modifications and Reg. (EU) n.2020/1245 for Simulants A, C and D1), free of bisphenol A

The vacuum and pressure values correspond to working temperatures of 23±2°C (ISO 291)

Temperature from -20°C to +60°C (withstands up to 100°C for sterilization processes at low pressure and for short time intervals)

ESPECIFICACIONES TÉCNICAS:

TECHNICAL SPECIFICATIONS:

Interior: Superficie lisa en caucho alimentario

Inside: Smooth surface in food rubber

Exterior: Corrugado, espiral polietileno

Outside: Corrugated, polyethylene spiral

Refuerzo: Malla de poliéster


Reinforcement: Polyester yarns

Temperatura: -20°C a +60°C

Temperature: -20°C to +60°C

Uso alimentario

Food use

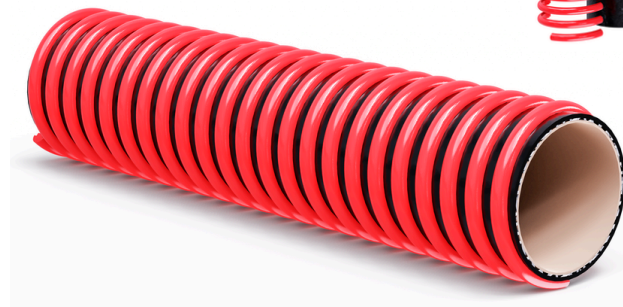

NUEVA
GAMA
CAUCHO

Código Code	Ø INT (mm) Ø INS (mm)	Ø EXT (mm) Ø EXT (mm)	Peso (gr/m) Weight (gr/m)	Min. R. curvatura (mm) Min. R. of curvature (mm)	Presión (bar) Pressure (bar)	Longitud (m) Length (m)	Colores disponibles Available colours
085032	32	45	787	80	8	40	■
085040	38	53	910	80	8	40	■
085045	44	57	1041	80	8	40	■
085050	51	66	1200	130	8	40	■ / ■
085060	60	76	1408	150	6	40	■
085065	64	82	1624	150	6	20	■
085070	70	87	1707	150	6	20	■
085075	76	94	2034	180	6	20	■
085080	80	97	2240	180	6	30	■
085090	90	109	2520	300	5	20	■
085100	102	121	2890	300	5	20	■

Otros diámetros y colores, consultar.

Other diameters and colours, consult.