



TECH OIL F-370 NBR



Manguera de caucho NBR con refuerzo de malla de poliéster y espiral de PVC

La espiral facilita el arrastre y manipulación

Especialmente diseñada para conducir gran variedad de alimentos grasos como mantequillas, aceites, productos lácteos y alcoholes hasta el 90%

Certificado Alimentario Reglamento CE 1935/2004 y sus posteriores modificaciones para Simulante D2, libre de bisfenol A y ftalatos

La mezcla de caucho no contiene plásticos añadidos intencionadamente, que contengan MOAH y MOSH

Los valores de vacío y presión corresponden a temperaturas de trabajo de 23±2°C (ISO 291)

NBR rubber hose with polyester yarn reinforcement and PVC spiral

The spiral facilitates dragging and handling

Specially designed to handle a wide variety of fatty foods such as butter, oils, dairy products and alcohols up to 90%

Food Certificate Regulation according CE 1935/2004 and its subsequent modifications for Simulant D2, free of bisphenol A and phthalates

The rubber compound does not contain intentionally added plastics containing MOAH and MOSH

The vacuum and pressure values correspond to working temperatures of 23±2°C (ISO 291)

ESPECIFICACIONES TÉCNICAS:

TECHNICAL SPECIFICATIONS:

Interior: Superficie lisa en NBR

Inside: Smooth NBR surface

Exterior: Corrugado, espiral PVC rígido

Outside: Corrugated, rigid PVC spiral

Refuerzo: Malla de poliéster

Reinforcement: Polyester mesh

Temperatura: -20°C a +60°C

Temperature: -20°C to +60°C

Uso alimentario


Food use



Colores disponibles

Available colours

086

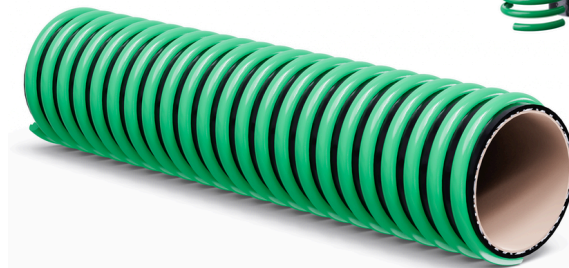

NUEVA
GAMA
CAUCHO

Código Code	Ø INT (mm) Ø INS (mm)	Ø EXT (mm) Ø EXT (mm)	Peso (gr/m) Weight (gr/m)	Min. R. curvatura (mm) Min. Bending R. (mm)	Presión (bar) Pressure (bar)	Longitud (m) Length (m)
086032	32	47	1.000	80	8	40
086040	38	54	1.280	80	8	40
086045	45	60	1.350	80	8	40
086050	51	68	1.520	80	8	40
086060	60	78	1.640	130	8	40
086065	63,5	81	1.700	130	8	20
086070	70	86	1.800	150	6	20
086075	76	94	2.220	150	6	20
086080	80	98	2.500	240	5	20
086090	90	111	2.960	300	5	20
086100	102	123	3.460	300	5	20

Otros diámetros y colores, consultar.

Other diameters and colours, consult.